





Rotary Tiller

MF17



Rotary Tiller MF17

Technical Data

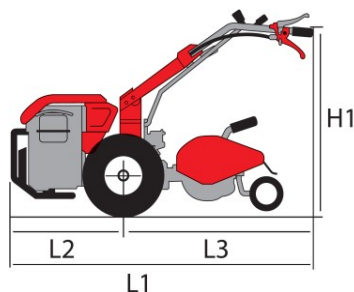

	mm	inches
L1	2180	85.8
L2	730	28.7
L3	1450	57.1
H1	600 - 1300	23.6 - 51.2
W1	420 - 510	16.5 - 20.1
W2	600 - 900	23.6 - 35.4

Engine	
Lombardini Type	3LD510
Displacement	1 cyl. / 4-stroke diesel 510 cm ³
Engine output	9.0 kW / 12 HP
Revolution speed	3000/rpm
Starter	Electric start
Air filter	Oil-bath
Fuel filter	Sieve and filter element

Operational characteristics	
Weight (incl. tiller and tires)	250 kg / 551 lbs.
Working speed: 4 forward and 1 reverse gears	<p>1.08 km/h / 0.67 mph 1 1R 2.82 km/h / 1.75 mph</p> <p>2.02 km/h / 1.26 mph 2</p> <p>3.61 km/h / 2.24 mph 3</p> <p>7.91 km/h / 4.92 mph 4</p>
Tires	6.50/80x12"
Brakes	Drum brakes (steering clutch brakes)
Steering bar	Steel tube bar on silent bearings 180° swivel height and side adjustment by hand
Clutch	Single, dry clutch friction disc
2 x PTO shaft	Standard PTO shaft with 2 speeds and independent PTO with reversing stop
Differential	Limited slip differential
Safety	Dead man's brake on steering bar
Extra	Trailer coupling and lights

Optional accessories:

- Ridge Plow 180°
- Tiller 80cm/31.5" (Standard) (adjustable 60cm/23.6") ; Tiller 90cm/35.4" (adjustable 70cm/27.6")
- Rotary Sweeper 100cm/39.4" pivoting brush roller diameter 38cm/15"
- Bar Mower kpl. 122cm/48" incl. Quickfit / 1 set replacement blades
- Snow Blade 100cm/39.4"
- Flail mower 65cm/25.6" or 85cm/33.5"
- Drum/Rotary Mower 80cm/31.5" 4 x rotary blades
- Sickle Mower 70cm or 80cm/31.5"
- Rotary Harrow 84cm/33.1"
- Stoneburier 64cm/25.2" incl. rear roller in expanded metal, depth adjustment and automatic slip clutch
- Snow Blower 80cm/31.5" discharge throwing distance 10-15m / 32'-49'
- Trailer max. Payload 350kg/772lbs., dimensions platform: 1240x950x300mm / 48.9"x37.4"x11.8", tires 145x70-8
- Trailer max. Payload 500kg/1102lbs., dimensions platform: 1370x1003x300mm / 53.9"x39.5"x11.8", tires 155 R13



orders@gnhardscape.com
www.greatnorthhardscape.com
1.800.720.7627