


Multi-Loader



optional with wheels

ML 350 E



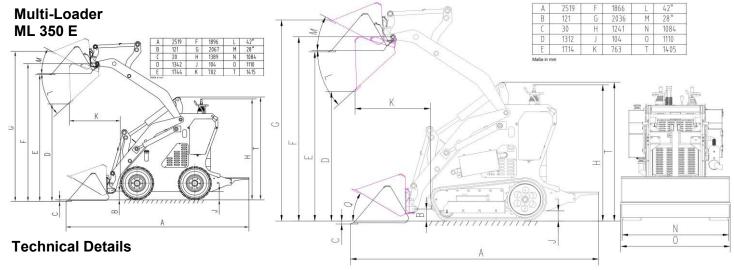

Motor	
Honda	GX 690
Туре	2 Cyl. / 4-stroke
Displacement	688 cm ³
Engine Output	18.4 kW (25.0 HP)
Revolution Speed	3600 rpm
Starter	Electric Starter
Air Filter	Dry Cartridge
Fuel Filter	Sieve
Drive	Hydrostatic
Guidance	Hydraulic Motor
Multi-valve Block	Hydrocontrol
Hydraulic pump	Permco
Characteristic	Quick-change system
	joystick control, electric start

Operating Data	
Weight Without Attachments Operating Payload	850 kg 350 kg
Operating Weight (loaded)	1200 kg
Tipping Device	Hydraulic
Climbing Ability	Max. 20° (36%)
Working Speed	0 – 5 km/h
Oil Pressure	180 bar
Oil Flow Rate	24.6 ltr./min.

Attachments	4 in 1 bucket, attachment excavators, pallet fork, gripper, auger, sweeper, trencher, hydraulic breaker/hammer
-------------	--



Authorized Dealer:



orders@gnhardscape.com www.greatnorthhardscape.com 1.800.720.7627