

REMINDER

- We recommend using this product at temperatures over 32°F (0°C).
- Install the product only in good weather conditions. Rain showers immediately after the installation could carry the polymeric sand back to the paver surface. Cover it up!
- Make sure the pavers, slabs or stones are dry before you start spreading the sand to avoid sticking or staining. Furthermore, make sure that pavers are free of polymeric sand before spraying with water.
- Before using a sealer on your paved surface, we recommend to wait at least 20 days and check with the paver manufacturer to find out if it is safe to apply a sealer at this time.
- This product must be stored in a dry place.

INSTALLATION INSTRUCTIONS

STEP 1 : Pour the EV EVOLUTION polymeric sand on a completely dry surface.

STEP 2 : Using a push broom, spread the polymeric sand over the joints making sure to fill to the full depth of the paver, stone or slab (minimum 2 3/8" (6 cm) depth).


STEP 3 : Use a vibrating plate over the entire area for joints less than 1/4". Repeat steps 1 to 3 until the joints are completely filled.

STEP 4 : To avoid having the product sticking to the top of the pavers, stones or slabs, remove all the remaining sand with a fine bristle brush and a leaf blower.

STEP 5 WATERING : Use a water hose with a spray nozzle to water the area with a gentle mist or shower setting, to avoid displacing the polymeric sand. We recommend doing a spot check to make sure the water has filtered through to a minimum of 1" (2,54 cm) of the depth of the joint. Simply scratch the sand with a screwdriver or sharp object to visualize, then pack-it back to the original condition. **Do not over-water or flood, causing a runoff.**

STEP 6 DRYING/SETTING : Allow at least 24 hours of drying time for a maximum stability and performance of this product before exposure to rain. Drying or hardening time will vary depending on weather conditions. Cold and damp temperatures will increase the drying time substantially.

Follow the manufacturer's instructions carefully. Have the technical data sheet on hand prior to the start of the installation. www.sablemarco.com

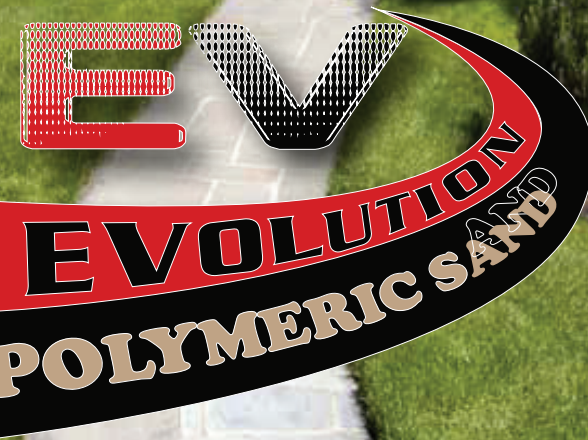

New all-in-one formula

FOR JOINTS UP TO 4" (10 CM) WIDE

For pavers, slabs and flagstones joints

Available Colours

BLACK, GREY, BEIGE, WHITE

Will not stain pavers



GREAT NORTH
LANDSCAPE PRODUCTS
DIV. OF SNAPEGE CANADA

www.greatnorthlandscape.com




NEW GENERATION

For the installation of
pavers, slabs and
flagstones

- Apply product dry, hardens after spraying with water
- Use horizontally or on sloped surfaces
- Rapid setting in warm and sunny weather
- Withstands freeze / thaw cycles
- Prevents weed growth and ant hills
- Maximum width of joints 4" (10 cm)
- Minimum wetting depth 1" (2,5 cm)
- Minimum depth of polymeric sand 2 3/8" (6 cm)
- Rapid setting and easy to install



Available Colours: Beige, Grey, Black, White

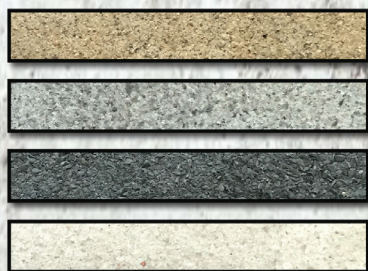

EV EVOLUTION polymeric sand is a specially formulated high performance mix of graded sand and binding agent to fill pavers joints. EV EVOLUTION superior performance and durability is ideal for the installation of pavers, natural stones, flagstones joints, as well as replacing existing joints on sidewalks, patios, sloped driveways or walkways. EV EVOLUTION will remain stable and flexible and maintain its flexibility and durability in the most extreme weather conditions.

COVERAGE

A 50 lb (22,7 kg) bag of EV EVOLUTION polymeric sand can cover approximately between 18 and 127 square feet (1,7 and 11,8 m²) of pavers depending on the shape, width of the joints and thickness of the paver or stone used.

WIDTH OF JOINTS		YIELD PER BAG		SURFACE		
				64 Sq.Ft.	100 Sq.Ft.	400 Sq.Ft.
mm	in	m ²	Sq.Ft.	6 m ²	9 m ²	36 m ²
2	1/16"	9.4	126.7	1 bag	1 bag	4 bags
3	1/8"	6.3	64.5	1 bag	2 bags	6 bags
6	1/4"	3.3	33.4	2 bags	3 bags	12 bags
10	3/8"	2.0	23.0	3 bags	5 bags	18 bags
13	1/2"	1.6	17.8	4 bags	6 bags	23 bags

Based on a standard paver : 2 x 4 x 8" (50 x 100 x 200 mm)

Bag 22,7 kg (50 lb), 63 bags per pallet
All pallets are protected
with heavy film wrapping

WARRANTY

The materials used in making this polymeric jointing sand are of the highest quality under strict production control. The manufacturer has no control over the preparation and the application of the products, and therefore, cannot guarantee the end result. Our warranty is limited to the replacement or reimbursement of defective product. Claims must be submitted to Great North Landscape Products, within 20 days from the date the problem was discovered with a proof of purchase.

Made in Canada

Authorized Dealer: